

magnum

Metro 5



PLEASE READ ME FIRST

www.magnumbikes.com

1. General Introduction

1.1 Welcome 01

1.2 Use of Manual 01

1.3 Service and Technical Support 01

1.4 Bike Components 01

1.4.1 Handlebar 01

1.4.2 E-Bike 02

1.5 Technical Data 03

2. Installation and Adjustment

2.1 Handlebar and Stem Assembly 04

2.2 Assembly of the Pedals 05

2.3 Seat Position 06

2.4 Saddle Height 07

2.5 Saddle Adjustment 07

3. Battery and Charger

3.1 Overview 08

3.2 General Remarks 08

3.3 Installing and Removing the Battery 08

3.4 Charging 08

4. Display 09

5. Recommendations and Maintenance

5.1 General Requirements 17

5.2 Maintenance Schedule 18

5.3 Definition of Tampering and Recommendations 19

6. Warranty 20

1. General Introduction

1.1 Welcome

Thank you for purchasing a Magnum electric bike and welcome to the Magnum Bikes family of e-bike enthusiasts. We encourage you to join our Facebook group “Magnum Bikes Community” which you can find at the following link: <https://www.facebook.com/groups/389290978573773> Our Facebook group is a place for Magnum riders to ask questions, have discussions, share recommendations and experiences and connect with other Magnum Bike enthusiasts.

1.2 Use of Manual

We encourage you to read this manual thoroughly before you take your new E-bike for a ride. It is important not to overlook the safety instructions and explanations of both traditional and non-traditional bike parts, as this will offer you a general understanding of your new E-bike. This manual is designed to help you get the most out of your E-bike, and so we have attempted to answer as many of your potential questions as possible. Please take a moment to read through the various sections before you get in the saddle.

1.3 Service and Technical Support

This manual is intended as a general overview of your new E-bike, and is therefore not an extensive reference. For technical support, including information about service, maintenance and repairs, please consult your dealer. You can visit our website (www.magnumbikes.com) for more information about our products and technology, or to find a dealer close to you.

1.4 Bike Components

1.4.1 Handlebar



- | | |
|-----------------------|-------------------------|
| 1. Left Brake Lever | 6. Right Brake Lever |
| 2. Left Grip | 7. Right Grip |
| 3. Display Controller | 8. Throttle |
| 4. Display | 9. Handlebar |
| 5. Adjustable Stem | 10. 8-Speed Thumb Shift |

1. General Introduction

1.4.2 E-Bikes



- | | | | |
|------------------------------|--------------------------|----------------------|-------------------|
| 1. Rear Light | 8. Rear Disk Brake | 15. Kickstand | 22. Front Fender |
| 2. Rear Fender | 9. Bungee Cord | 16. Pedal | 23. Rim |
| 3. Motor | 10. Saddle | 17. Crankset | 24. Front Fork |
| 4. Freewheel | 11. Seatpost | 18. Controller | 25. Quick Release |
| 5. Rear Derailleur Protector | 12. Saddle Quick Release | 19. Front Disc Brake | 26. Tire |
| 6. Rear Derailleur | 13. Battery | 20. Adjustable Stem | |
| 7. Carrier | 14. Chain | 21. Front Light | |


1.General Introduction

1.5 Technical Data


Component	Metro
Motor	48V, 500W Bafang Rear Geared Hub Motor
Battery	48V, 13Ah, 624Wh Li-ncm
Display	Magnum fixed, backlit, monochrome LCD
Throttle	Thumb Paddle Throttle
Front Fork	Front Suspension with Lockout
Crankset	Prowheel
Brake Levers	Left and Right
Brakes	Mechanical Disc Brakes
Derailleur	Shimano, Acera, 7-speed
Freewheel	7-speed
Tires	26" x 2.4"
Front Light	Integrated and controlled from the display
Rear Light	Integrated and controlled from the display
Max Loading ¹	265lbs
Max Speed ²	Cadence sensing PAS up to 25mph, trigger throttle up to 20mph
¹ Max load includes the bike	
² Can be configured to class 1, 2, or 3 e-bike	

2. Installation and Adjustment


2.1 Handlebar and Stem Assembly

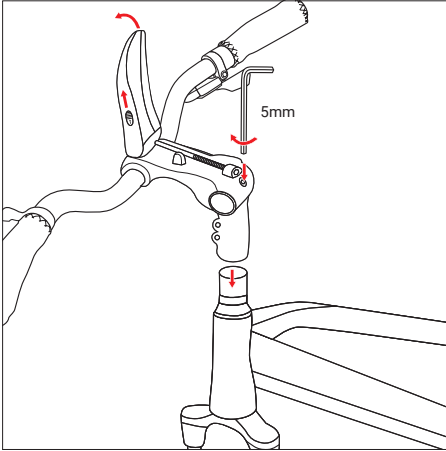


1. Open the top cover, align the stem with the head tube and slide it on. Tighten the screw at the top of the stem.

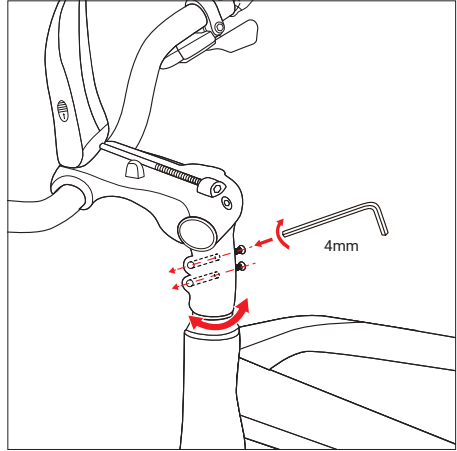

2. Align the handlebar to be perpendicular to the wheel, then insert and tighten the two side-facing screws as shown below.

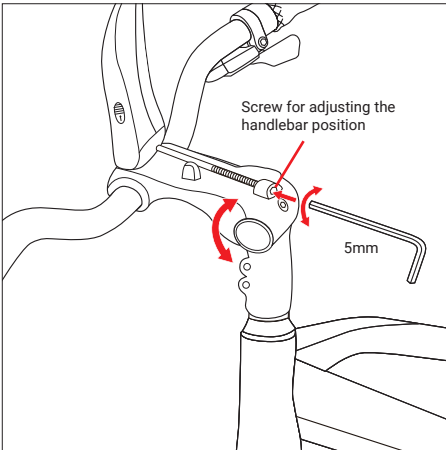

3. Move the handlebar up or down to adjust to the desired angle, then tighten the rear-facing screw at the top of the stem to lock the handlebar in place.

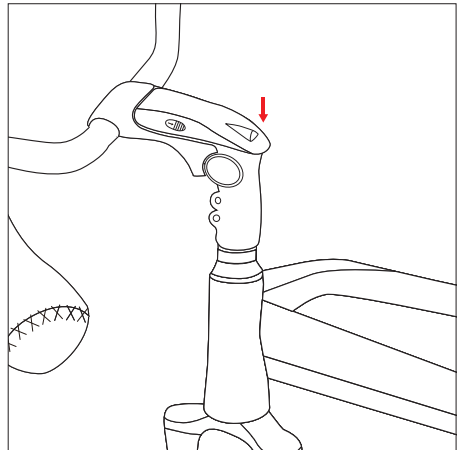

4. Close the cover to complete installation and adjustment.


2. Installation and Adjustment



2.2 Assembly of the Pedals

Identify your pedals: check the letters on the pedals, "L" or "R".

The "R" marked pedal is for the right (when facing the forward direction). For attachment to the crank, tighten clockwise.


The "L" marked pedal is for the left. For attachment, tighten counterclockwise when facing directly.

 **WARNING** First screw on the pedals by hand, then tighten with the wrench provided.

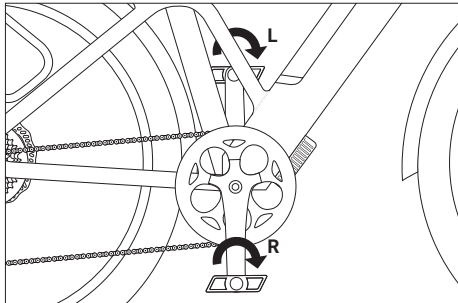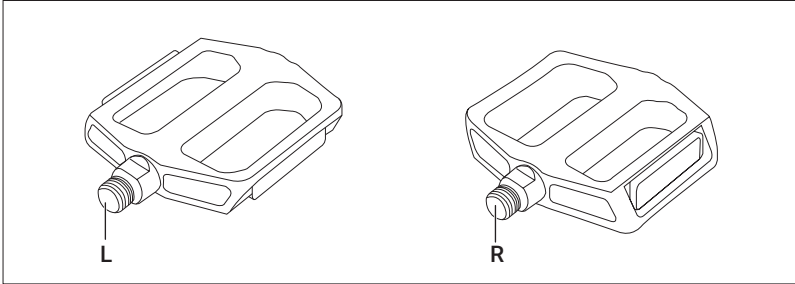




2. Installation and Adjustment

2.3 Seat Position



To enable comfortable, fatigue-free and safe riding, the saddle and handlebar height should be adjusted to the body size of the rider.

The saddle height is correct if the leg is near full extension while the foot is resting flat on the pedal in the bottom position of the crank cycle. The toes must still be able to touch the ground comfortably.

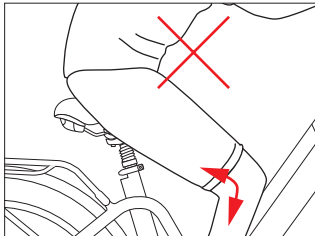

Optimal

2. Installation and Adjustment

2.4 Saddle Height

The quick-release lever must require noticeable effort to put into fully closed position to prevent any undesired movement while riding.

WARNING


An improperly closed quick release lever can open again or have limited ability to keep the saddle in place. This may cause the saddle to suddenly drop into the seat tube, potentially leading to serious falls and injury.

There is a minimum insertion line marked on the seat post (failure to observe the minimum insertion line can result in serious injury); please ensure the seat post is always inserted into the seat tube beyond this line (the line must be inside the seat tube).

Loosen the quick release lever at the top of the seat tube, determine the appropriate saddle height and tighten the clamp.

The clamping force can be adjusted by adjusting the bolt on the quick release lever.

The quick release lever must be closed with considerable counter pressure.

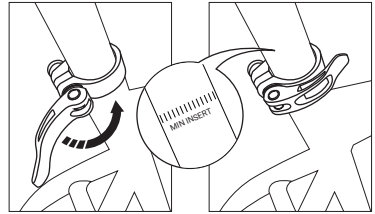

2. Installation and Adjustment

2.5 Saddle Adjustment


The saddle can also be tilted and adjusted in the forward/back direction.

Loosen the bolt at the bottom (4).

Adjust the saddle tilt by pressing down on the front or rear of the saddle

Move the saddle forward or backward to adjust for arm/torso length and desired riding position.


Tighten the bolt (4) to secure the saddle.

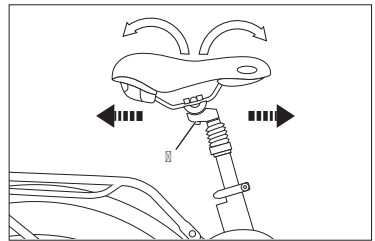

3. Battery and Charger

3.1 Overview


- A Battery
- B Charging Socket
- C Battery Handlebar
- D Capacity Level Light
- E Power Button
- F USB Port (on some batteries)

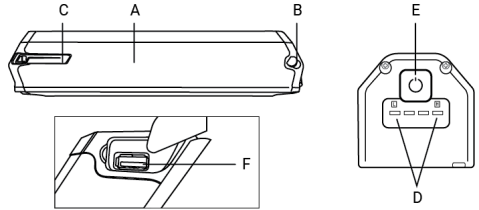

⚠ WARNING

Please ensure that the battery is locked in place before use

- A AC Plug¹
- B Charger
- C Charging Indicator
- D Battery Plug



¹Type will vary

3.2 General Remarks

Stop charging the battery immediately if you notice anything unusual, such as smoke or a strange smell; take out the battery and store it outside of the house, then take the battery to an authorized dealer or experienced technician for service or replacement.

In the unlikely case that the battery catches fire, do NOT attempt to put it out with water. Use sand or another fire retardant instead and call emergency services immediately.

3.3 Installing and Removing the Battery

The battery has a lever (1) and is secured with a lock (2)

Unlock the battery and pull it out

Insert the battery into the frame until it stops

Remove the key from the lock (2). Ensure that the battery is well secured



3.4 Charging


Charging at temperatures below 32°F (0°C) or above 140°F (60°C) can cause the battery to charge insufficiently and can be harmful to the life of the battery

During charging, the charger's LED light will be continuously red

Charging is completed when the charger's LED turns green

4. Display

4.1 Appearance

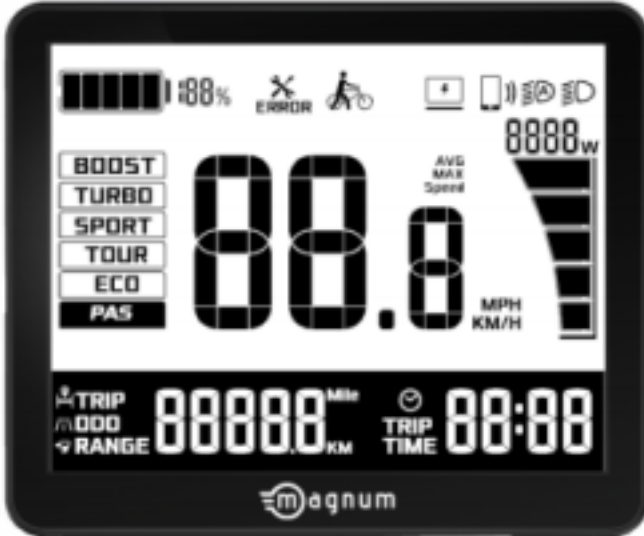

Powering ON/OFF


Press and hold the power button to turn on the display. A start-up screen (see image below) will display for approximately 2 seconds before entering the main interface showing real-time information.

To turn the display off press and hold the power button until the screen goes blank. The display will turn off automatically if no operations are performed within the set sleep time, while the speed is 0, and current is less than 1A. The sleep time can be set by the user in the settings interface.



4. Display

Indicators & Buttons

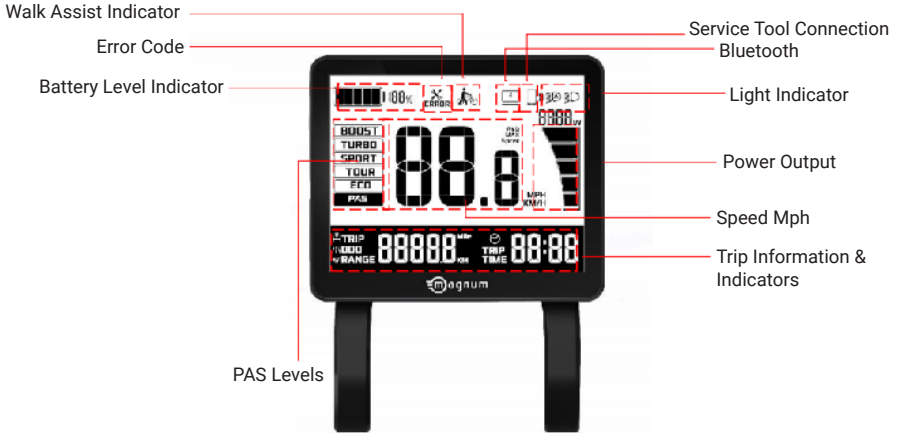

Button Functions

Power On: Turns the display on/off

Adjust Up/Down: Changes the level of pedal assist during riding and switches functions in display settings


Mode Function: Switches interface functions and enters into the display settings

4.Display

Pedal Assist Level

Short press the arrow buttons to adjust the pedal assist level up or down. There are 5 PAS levels: ECO, TOUR, SPORT, TURBO, BOOST, and BOOST+. BOOST+ is indicated by a blinking BOOST icon. When PAS level is empty it means pedal assist is off.

PAS levels do not switch in cycles. Meaning, after reaching the BOOST level pressing the up arrow will NOT cycle the levels back to the beginning. The user must use the down arrow button to switch back down to PAS off.

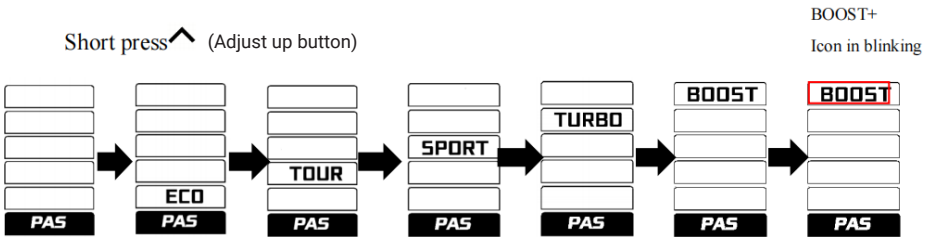

Short press  (Adjust down button)



4.Display


Trip, Odometer, & Range

Short press the M button to switch from TRIP, ODO, & RANGE on the display. The cycle order is TRIP/AVG, ODO/MAX, then RANGE/AVG. After 5 seconds with no operation performed on the M button and the bike speed greater than 0 the display screen will switch back to the main interface. The symbols below will indicate which value is being shown.



Light Control

Long press the adjust up button to turn the headlight on and off. While the headlight is on the display's backlight is dimmed.

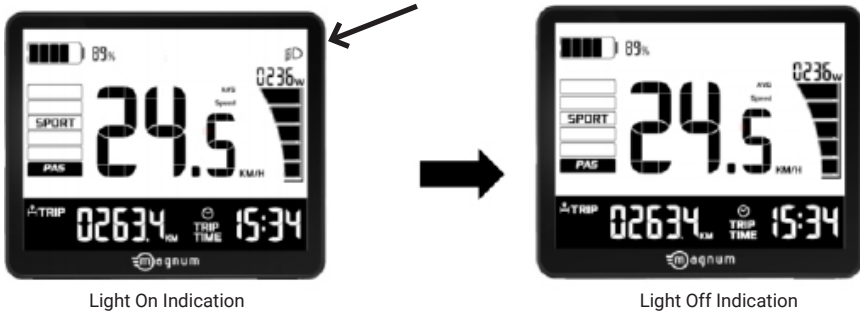








Speed Indication

The standard readout is real time speed, and can be switched to show average speed (AVG), and maximum speed (MAX).

How to change speed readout...

Battery Power

Battery power is shown by a battery bar indicator and percentage. The battery bar divides the power level into 5 bars. After battery capacity is lower than 5% the display enters low voltage mode. In this mode the battery level shows 0 bars. The battery outline will start blinking after reaching 1Hz, and with no power output from the motor, pedal assist will be disabled. The PAS level is displayed as OFF or 0. To get out of low voltage mode the battery will need to be charged.

SOC	Battery level	Description
$80\% \leq \text{SOC}$		Full battery level 5
$60\% \leq \text{SOC} < 80\%$		Level 4
$40\% \leq \text{SOC} < 60\%$		Level 3
$20\% \leq \text{SOC} < 40\%$		Level 2
$10\% \leq \text{SOC} < 20\%$		Level 1
$5\% \leq \text{SOC} < 10\%$		Level 0
$0\% \leq \text{SOC} < 5\%$		Level 0 and icon blink at 1Hz

Walk Mode

When speed is below 3mph long press and continue to hold the adjust down (down arrow) button to enter walk mode. Upon entering walk mode the display will show a walk mode symbol and the real-time speed while the PAS level displays as off (see image below). Release the adjust down button to exit walk mode. The motor is turned off and the display returns to the main interface.



Display Settings






The following description explains how users can access the settings options in their display.

Within 10 seconds of turning on the display, long press the M button to enter the settings interface.

Short press the arrow buttons to switch between settings. Short press the M button to enter a specific setting. The selected setting will blink. Short press the arrow buttons to find the setting option you want then long press the M button to set the option. Long press the M button again to exit to the previous page.

In settings short press the M button to enter the next level menu and long press the M button to exit and return to the previous level menu.

Descriptions of individuals settings to follow:

Setting items	Interface	Description	Setting data	Remark
Unit setting		UNT=Unit	Value=KM/H MPH	Default Value=KM/H KM/H—Metric MPH—Imperial
Backlight level setting		bLG=Back light	Value= LEVEL1,backlight level 60% Value= LEVEL 2 backlight level 80% Value= LEVEL 3 backlight level 100%	Default Value= LEVEL 1
Auto shutdown time		SLP= Auto sleep	Value=0-30 min	Default Value=5min OFF means no auto shutdown
Real time clock		N/A	N/A	 Hour: minutes

Software version info		DPS= Display software version	Read only	Default fix value
Advanced setting interface		SET=setting	Enter with passcode	*For entering advanced setting items
—Advanced setting sub-level parameter interfaces:				
Speed limitation setting		SPd=Speed limitation	Value= PAS 3/4/6	Default: PAS 6 PAS 3= Pedal assist 3 levels, Speed limit 16MPH, PAS 4= Pedal assist 4 levels, Speed limit 20MPH, PAS 6= Pedal assist 6 levels, Speed limit 28MPH
Wheel diameter setting		dIA=Wheel diameter	Value= 16, 20, 24, 26, 27, 27.5, 28, 700C, 29, (default unit, inch)	Default: Value= 26
System voltage setting		Vol= system voltage	Value=36/48V	Default: 48v

Data Clearance

Whithin 10 seconds of turning on the display, when the display shows the TRIP interface, long press the M button to show TRIP data. While the TRIP icon is blinking short press the M button to confirm data clearance. To exit long press the M button. After clearance the subtotal mileage TRIP is 0, average speed is 0, and max speed is 0. ODO information can not be cleared manually on the display.

Error Code Table

Each error code corresponds to a specific fault in the system. The table below is intended for the e-bike owner to use as reference when working with Magnum Bikes technical support or a certified Magnum dealer.

Error Code	Definition	Suggestion
"0x20" shown at speed	Failure of controller	Check controller
"0x22" shown at speed	Failure of throttle	Check throttle
"0x23" shown at speed	Failure of motor's phase wire	Check motor
"0x24" shown at speed	Failure of the motor's hall	Check controller
"0x30" shown at speed	Communication failure	Check connector to controller

If you still some questions about the display, please contact your Magnum dealer.

5. Recommendations and Maintenance

5.1 General Requirements

E-bikes use metal shells to cover the electric components, so we strongly advise against the use of excessive water to wash the shells and parts around them. Use a soft cloth with a neutral solution to wipe the dirt off the shells. Afterward, wipe everything dry with a clean soft cloth.

Do not use high-pressure water or air hoses for cleaning; this can force water into electrical components, which may cause malfunctioning.

Do not wash plastic components with excessive water. When the internal electrical parts are affected by water the insulator may corrode, leading to power-drain or other problems.

Do not use soap solutions to wash the metal components. Non-neutral solutions may cause discoloration, distortion, scratching, etc.

Avoid leaving the bike outdoors

When not riding, keep the bike in a location where it will be protected from snow, rain, sun, etc. Snow and rain can cause the bike to corrode. Ultraviolet rays from the sun can cause unnecessary fading of paint or crack any rubber or plastic on the bike.

Recommended Torque Values		
Front Wheel Nuts	22-27 Newton Meters	16.2–19.8 ft·lb
Rear Wheel Nuts	24-29 Newton Meters	17.5–21.3 ft·lb
Seat Binder Bolt	12-17 Newton Meters	8.8–12.5 ft·lb
Seat Post Clamp Nut	15-19 Newton Meters	11.0–14.0 ft·lb
Brake Anchor Nut	7-11 Newton Meters	5.1–8.1 ft·lb
Handlebar Clamp Nut	17-19 Newton Meters	12.5–14.0 ft·lb
Headset Expander Nut	17-19 Newton Meters	12.5–14.0 ft·lb
Crank Cotter Pin Nuts	9-14 Newton Meters	6.6–10.3 ft·lb
Brake Centre	2-17 Newton Meters	1.5–12.5 ft·lb

5.2 Maintenance Schedule

To keep your E-bike in optimal condition and your riding experience at its most enjoyable, we strongly recommend following the suggested maintenance schedule. You should study it and allow it to become second nature to your riding.

Maintenance Schedule	Each Ride	Weekly	Monthly	6 Months	Yearly
Tire Pressure	X				
Tire Condition	X				
Visual Inspection	X				
Brake Lever Pressure	X				
Quick Releases	X				
Handlebar Alignment	X				
Saddle Alignment	X				
Battery Pack Locked	X				
Wheel Check	X				
Inspect Frame Condition ¹		X			
Clean & Lubricate Chain		X			
Check Brake Pads		X			
Lubricate Forks			X		
Lubricate Brakes & Cables			X		
Lubricate Folding Mechanism			X		
Check all Bolts & Torque Settings			X		
Clean Bicycle			X		
Charge Battery			X		
Check Heel Spokes			X		
Inspect Rim Condition			X		
Inspect Saddle, Rails & Clamp			X		
Grease Pedal Bearings				X	
Check Hub Bearings				X	
Check Headset Bearings				X	
Check Bottom Bracket Bearings				X	
Replace Brake Pads					X
Replace Brake Cables ²					X
Replace Tires ²					X

⚠ Warning

As with all mechanical components, electrically power assisted cycles (EPAC) are subjected to wear and high stresses. Different materials and components may react to wear or stress fatigue in different ways. If the design life of a component has been exceeded, it may suddenly fail, possibly causing injuries to the rider. Any form of crack, scratches or change of coloring in highly stressed areas indicate that the life of the component has been reached and it should be replaced.

5.3 Definition of Tampering and Recommendations

Category 1			
Components which can only be replaced after approval from the bicycle manufacturer/ electronic system provider			
Motor	Controller	Electric Cables	Battery
Sensors	Controls on the Handlebar	Display	Battery Charger

Category 2			
Components which can only be replaced after approval from the bicycle manufacturer			
Frame	Hubmotor Wheel	Brake Shoe	Bottom Bracket
Fork ⁹	Brake System	Luggage Carrier	

Category 3			
Components which can only be replaced after approval from the bicycle or component manufacturer			
Cranks	Wheel without Hub Motor	Tires ³	Brake System ⁴
Chain Belt ¹	Rim Tape	Mechanical Brake Cables	Handlebar ⁵
Seat Post Headlight ²	Saddle Headlight ²	Hydraulic Brake Cables	Stem ⁵

¹at original width

²maximum variation from original should not exceed 20mm

³at original ETRTO specifications only

⁴for drum, disc and roller brakes

⁵without alterations to the handlebar and stem

Category 4			
Components which can be replaced without approval			
Headset	Inner Tubes	Shifting Inner & Outer Cables	Kickstand
Pedals ¹	Chainring	Dynamo	Grips ⁴
Derailleurs	Front Light	Cassette Freewheel Cogs ³	Front Reflector
Shifters	Rear Light	Chaincase	Rear Reflector
Mudguards ²	Spokes	Wheel Reflectors	Belt Drive Ring

¹at the same width as the originals

²only the same size as the originals and mounted at least 10 mm distance from the tire

³when the cogs are the same as the originals

⁴only with a screw clamp

Warning

Modifications to any part of your bike, such as the fork or frame, may make that part or the entire bike unsafe. A poorly installed or modified component can increase the stress on all other parts, greatly increasing their chance of failure. Modifications can also adversely affect the handling of your bike, resulting in loss of control, falls and serious injury. Please do not add, remove, or modify parts of your bike in any way before consulting with a trained bike technician. We recommend you consult with us at before you make modifications or add parts, in order to confirm their safety and compatibility with your bike.

6. Warranty

Your Magnum E-bike comes with a limited warranty. Please visit www.magnumbikes.com or your local Magnum dealer for details.

Bike must be registered at www.magnumbikes.com/warranty in order to be covered by the one year warranty.

Stay Connected



@magnumbikes



@magnumbikes



www.magnumbikes.com



info@magnumbikes.com



323.375.2666

CE



info@magnumbikes.com



323.375.2666



www.magnumbikes.com